




DENNIS PREMIER

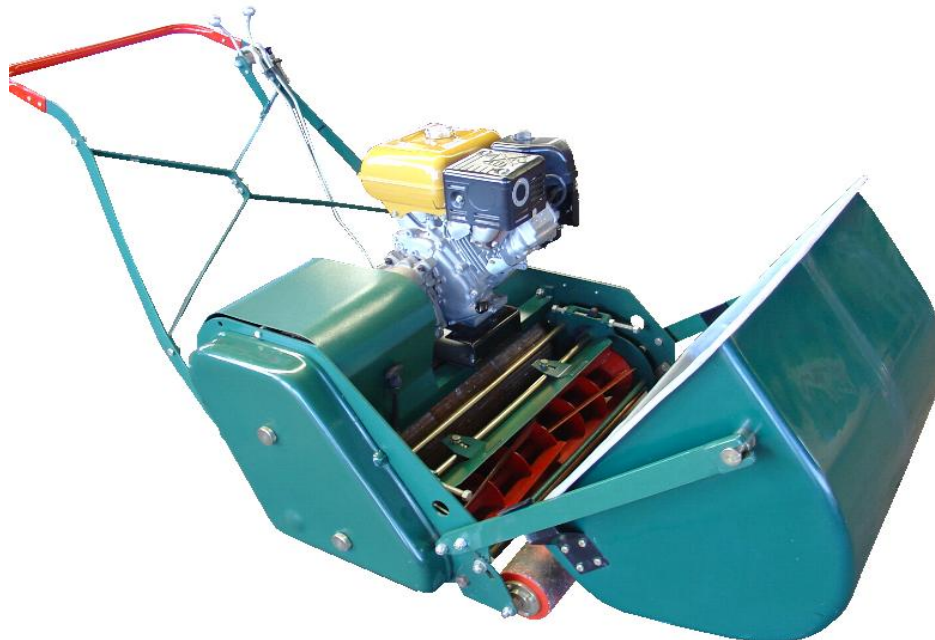

SPECIFICATIONS

| | | | |
|-----------------------------|---|-------------|-------------|
| <u>MODEL</u> | THE DENNIS PREMIER RANGE OF HEAVY DUTY, SELF PROPELLED CYLINDER MOWERS ROBIN EH41DU 13.5HP AND POWER PRO CP140 13HP + GEARBOX 6:1 | | |
| <u>ENGINE OPTIONS</u> | SHEET STEEL AND ANGLE IRON FABRICATION | | |
| <u>CHASSIS</u> | FROM ENGINE VIA FLEXIBLE DRIVE COUPLING TO HEAVY-DUTY OIL-BATH GEARBOX. FROM GEARBOX VIA 2 CAR-TYPE CLUTCHES AND ROLLER CHAINS TO THE REAR ROLLER AND CUTTING CYLINDER. | | |
| <u>TRANSMISSION</u> | 3-PIECE CAST IRON WITH MACHINE CUT GEAR DIFFERENTIAL RUNNING IN OIL BATH. SHAFT RUNS ON GREASABLE BALL- BEARINGS | | |
| <u>REAR ROLLER</u> | FULL LENGTH STEEL ROLL RUNNING ON SEALED BALL-BEARINGS. REMOVABLE AS A UNIT, INCORPORATES AN ALL-WELDED, OPPOSED SPIRAL, 6 BLADED CUTTING CYLINDER MADE OF SPECIAL-STEEL, RUNNING ON GREASABLE BALL-BERINGS. DRIVE INCORPORATES A SLIP CLUTCH. | | |
| <u>FRONT ROLLER</u> | EXCEEDS 70 CUTS PER MINUTE | | |
| <u>CUTTING UNIT</u> | 6MM - 56MM | | |
| <u>CUTTING RATIO</u> | LARGE CAPACITY TIP-OVER TYPE | | |
| <u>HEIGHT CUT</u> | 610 MM(24") | 760MM (30") | 910MM (36") |
| <u>GRASSBOX</u> | 750MM | 1000MM | 1150MM |
| <u>CUTTING WIDTH</u> | 2050MM | 2050MM | 2050MM |
| <u>OVERALL WIDTH</u> | 1000MM | 1000MM | 1000MM |
| <u>OVERALL LENGTH + BOX</u> | 305KG | 330KG | 365KG |
| <u>OVERALL HEIGHT</u> | TRAILING SEAT COMPLETE WITH ROLLERS, PNEUMATIC WHEELS OR SOLID WHEELS. ALL DIMENSIONS ARE APPROXIMATE | | |
| <u>WEIGHT(KOHLER)</u> | | | |
| <u>OPTIONAL EXTRA</u> | | | |