



## POWER PRO PETROL ENGINES SPECIFICATIONS

MODEL	CP60	CP70	CP100	CP140	CP140 ELECTRIC START
TYPE	AIR COOLED, 4-STROKE, OHV SINGLE CYLINDER INCLINED 25°				
BORE x STROKE (mm)	68 X 45	68 X 54	77 X 58	88 X 64	88 X 64
DISPLACEMENT (cm³)	163	196	270	389	405
COMPRESSION RATIO	8.5:1	8.5:1	8.2:1	8.1	8.1
MAX. POWER OUTPUT (HP/rpm)	5.5/3600	6.5/3600	9/3600	13/3600	14/3600
MAX. TORQUE (Nm/rpm)	8.8/2500	10.7/2500	15.8/2500	22/2500	22/2500
CRANK SPEED (rpm)	3600	3600	3600	3600	3600
IGNITION SYSTEM	TRANSISTOR CONTROLLED IGNITION (TCI)				
STARTING MODE	RECOIL START			ELECTRIC START	
FUEL TANK CAPACITY (lt)	4.2	4.2	6	9	9
AIR CLEANER	SEMI-DRY TYPE				
ENGINE OIL CAPACITY (lt)	0.6	0.6	1.1	1.1	1.1
FUEL CONSUMPTION (g/kwh)	395	395	374	374	374
DIMENSIONS (mm)	410 x 335 x 370	410 x 334 x 370	480 x 390 x 450	525 x 420 x 475	525 x 420 x 475
NET WEIGHT (kg)	15	15	25	31	31
<b>ALL THE ABOVE RECOIL START UNITS ARE AVAILABLE WITH TAPERED CRANK SHAFTS</b>					
<b>REDUCTION AVAILABLE:</b>	<b>YES</b>	<b>YES</b>		<b>YES</b>	
REDUCTION RATIO	2:1	2:1	NOT AVAILABLE	2:1	NOT AVAILABLE
ENGINE (rpm)	3600	3600		3600	
CRANK SPEED (rpm)	1800	1800		1800	

**NOTE:** Specifications may vary according to the types, and are subject to change without notice.

Head Office  
Cnr. Third Ave. & Klippen Rd.  
Vosterskroon, Nigel  
PO.Box 111, Nigel, 1490  
Tel: 011 730 3400  
Fax: 011 814 2345  
E-mail: [info@turfmaster.co.za](mailto:info@turfmaster.co.za)  
Web: [www.turfmaster.co.za](http://www.turfmaster.co.za)


Bellville  
Proton Crescent Stikland  
Tel: 021 945 4106/7/8  
Fax: 021 945 2371

Durban  
Unit 21, The Terrace,  
2 Goshawk Rd, New Germany  
Tel: 031 705 3323  
Fax: 031 705 3315


Port Elizabeth  
20 – 6th Ave, Walmer  
Tel: 041 581 8443/4/5  
Fax: 041 581 8446



**POWER PRO PETROL ENGINE**

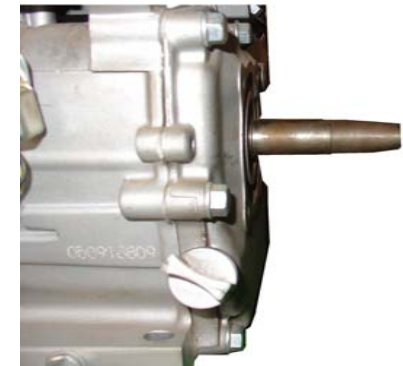

**TAPERED CRANK**

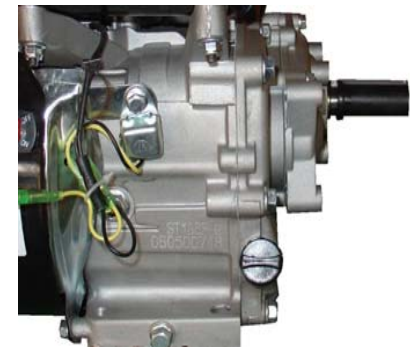

**2;1 REDUCTION**